

2011-2016 GM DURAMAX LML
PLUG-N-PLAY MODULE

USER MANUAL

Disclaimer

- By installing this product onto your vehicle, you assume all risk and liability associated with its use.
- GDP Tuning, LLC. is not responsible for misuse of its products. By installing this product, you release GDP Tuning, LLC. of any and all liability associated with its use.
- The purchaser and end user releases, indemnities, discharges and holds harmless GDP Tuning, LLC. from any and all claims, damages, causes of action, injuries, or expenses resulting from or relating to the use or installation of this product that is in violation of the terms and conditions on this page, the product disclaimer, and/or the product installation instructions. GDP Tuning, LLC. will not be liable for any direct, indirect, consequential, exemplary, punitive, statutory, or incidental damages or fines caused by the use or installation of this product.

Caution

Never work on a hot vehicle. Serious injury in the form of burns can result if the vehicle has been in use. Allow vehicle to cool prior to installation. Always wear eye protection when working on or under any vehicle.

2011-2016 GM DURAMAX LML PLUG-N-PLAY MODULE

GDP431002



- A. Harness
- B. Plug-N-Play Module

Notice:


Make sure to disconnect the negative side battery terminal before beginning your install. Failure to do so may cause CEL's and lack of performance.

Step 1

Find a dry location to mount the GDP module using the supplied zip ties. We recommend an area that is away from moving parts and extreme heat.

Step 2

Locate the Fuel Sensor. On the LML engine the Fuel Pressure Sensor is located on the back of the fuel rail on the driver's side. The Fuel Pressure sensor is illustrated in the diagram below and the connector will look the same as the one we supply on our harness. Disconnect the factory harness from the sensor by pressing on the back of the tab and pulling the connector toward the firewall.

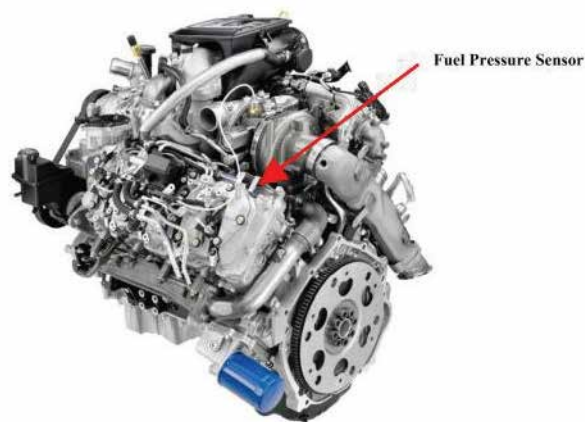

Step 3

Connect our harness to the fuel Pressure sensor and to the factory connector.

Step 4

Route the wire harness from the Fuel Pressure Sensor to the GDP module and connect the white 14 pin Molex connector into the module board.

Step 5

You are now ready to reconnect the negative battery terminals.